






STAR SERIES MONO PERC 120-cell MODULE

EG-465M60-HLV

455~465W

0~3% POSITIVE TOLERANCE


KEY FEATURES

- 
Mbb cell design
 Multi Busbar cells brings lower resistance and increased Busbar reflectance ensures higher power output
- 
High compatibility
 Innovative 182mm big cell, small size model design, compatible to variance Roof-top and installation methodology
- 
High Reliability
 Strict in-house testing in PV Lab which is CNAS approved & TUV /VDE certified
- 
Excellent Low-light Performance
 Advanced solar cell and glass surface texturing technology allows for excellent performance in low-light environments
- 
PID Resistant
 Excellent PID resistance performance optimized by unique structural design



LINEAR PERFORMANCE WARRANTY



 12 Year Product Warranty  25 Year Linear Power Warranty

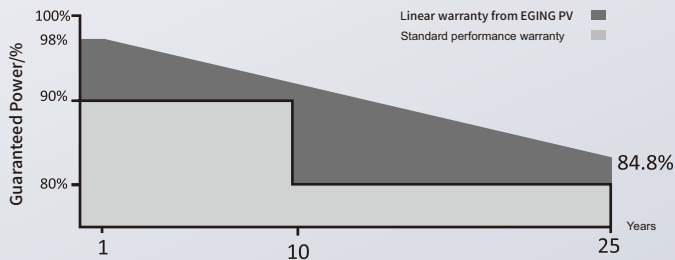



As a BloombergNEF Tier 1 and global leading manufacturer since 1998, EGING PV is committed to supplying reliable and durable PV products to customers to create together a greener planet.

EG-465M60-HLV

Engineering Drawings

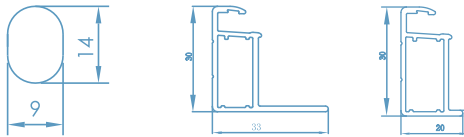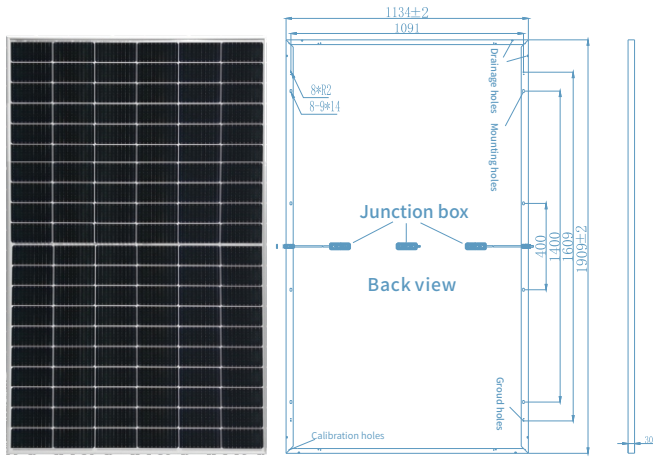

I-V Curves

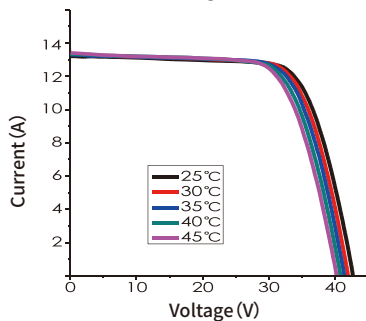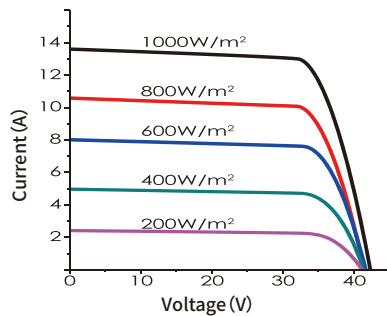

Packing Configuration

Pieces per pallet	36
Size of packing (mm)	1940*1135*1255
Weight of packing (kg)	848
Pieces per container	864
Size of container	40' HC

Electrical Characteristics

Power level	455	460	465
Pmax (W)	455	460	465
Vmp (V)	35.39	35.61	35.83
Imp (A)	12.86	12.92	12.98
Voc (V)	42.19	42.41	42.63
Isc (A)	13.61	13.67	13.73
Module efficiency (%)	21.02	21.25	21.48
Maximum system voltage (V)	1500		
Fuse Rating (A)	25		
Temperature coefficient Pmax (%/°C)	-0.350		
Temperature coefficient Isc (%/°C)	0.05		
Temperature coefficient Voc (%/°C)	-0.275		

STC: Irradiance 1000W/m², module temperature 25°C, AM=1.5

Working Characteristics

Power level	455	460	465
Pmax (W)	344	348	352
Vmp (V)	32.70	32.93	33.15
Imp (A)	10.52	10.57	10.62
Voc (V)	39.24	39.45	39.65
Isc (A)	11.14	11.19	11.24
Power tolerance (%)	0~+3		
NOCT (°C)	44±2		

NOCT: Conditions: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

Mechanical Characteristics

Number of cells	120pcs
Size of cell (mm)	182*91
Type of cell	Mono
Thickness of glass (mm)	3.2
Type of frame	Anodized aluminum alloy
Junction box	IP68
Size of module (mm)	1909*1134*30
Weight (kg)	22.3
Cables/connectors	4mm ² , MC4 compatible
Length of Cabel	Portrait: +300mm/-300mm

Maximum Ratings

Operating Temperature(°C)	-40~85
Operating humidity(°C)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s

Revised in March 2024 1st Edition

CAUTION: All rights and explain reserved by EGING PV.
Specifications included in this datasheet are subject to change without notice.
The specific content of the product warranty refers to EGING's latest warranty.



Tel: 86-519-82585880
Zip: 213213
Add: No.18, Jinwu Road, Jintan Dist,
Changzhou City, Jiangsu Province.
Email: marketing@egingpv.com
Web: www.egingpv.com